DCR3780V28

Phase Control Thyristor
Preliminary Information

DS5813-1.2 September 2005 (LN24190)

FEATURES

- Double Side Cooling
- High Surge Capability

APPLICATIONS

- High Power Drives
- High Voltage Power Supplies
- Static Switches

VOLTAGE RATINGS

Part and Ordering Number	Repetitive Peak Voltages V_{DRM} and V_{RRM} V	Conditions
DCR3780V28 DCR3780V26 DCR3780V24	2800 2600 2400	T_{vj} = -40° C to 125° C, I_{DRM} = I_{RRM} = 200mA, V_{DRM}, V_{RRM} t_p = 10ms, V_{DSM} & V_{RSM} = V_{DRM} & V_{RRM} + 100V respectively

Lower voltage grades available.

ORDERING INFORMATION

When ordering, select the required part number shown in the Voltage Ratings selection table.

For example:

DCR3780V28

Note: Please use the complete part number when ordering and quote this number in any future correspondence relating to your order.

KEY PARAMETERS

V_{DRM}	**2800V**
$I_{T(AV)}$	**3780A**
I_{TSM}	**50500A**
dV/dt*	**1500V/µs**
dI/dt	**300A/µs**

* **Higher dV/dt selections available**

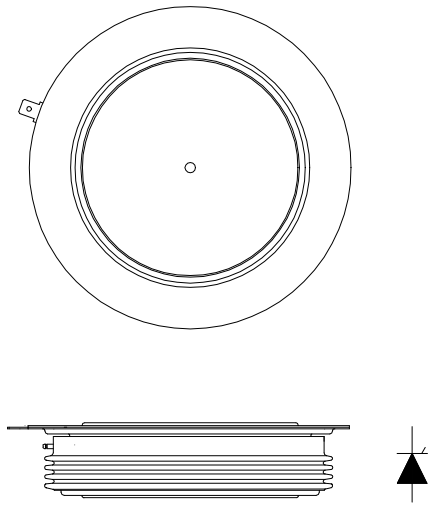

Outline type code: V

(See Package Details for further information)

Fig. 1 Package outline

CURRENT RATINGS

T_{case} = 60° C unless stated otherwise

Symbol	Parameter	Test Conditions	Max.	Units
Double Side Cooled				
$I_{T(AV)}$	Mean on-state current	Half wave resistive load	3780	A
$I_{T(RMS)}$	RMS value	-	5938	A
I_T	Continuous (direct) on-state current	-	5540	A

SURGE RATINGS

Symbol	Parameter	Test Conditions	Max.	Units
I_{TSM}	Surge (non-repetitive) on-state current	10ms half sine, T_{case} = 125° C	50.5	kA
I^2t	I^2t for fusing	V_R = 0	12.74	MA^2s

THERMAL AND MECHANICAL RATINGS

Symbol	Parameter	Test Conditions		Min.	Max.	Units
$R_{th(j-c)}$	Thermal resistance – junction to case	Double side cooled	DC	-	0.00746	° C/W
		Single side cooled	Anode DC	-	0.0130	° C/W
			Cathode DC	-	0.0178	° C/W
$R_{th(c-h)}$	Thermal resistance – case to heatsink	Clamping force 54kN	Double side	-	0.002	° C/W
		(with mounting compound)	Single side	-	0.004	° C/W
T_{vj}	Virtual junction temperature	On-state (conducting)		-	135	° C
		Reverse (blocking)		-	125	° C
T_{stg}	Storage temperature range			-55	125	° C
F_m	Clamping force			48.0	59.0	kN

DYNAMIC CHARACTERISTICS

Symbol	Parameter	Test Conditions		Min.	Max.	Units
I_{RRM}/I_{DRM}	Peak reverse and off-state current	At V_{RRM}/V_{DRM}, T_{case} = 125° C		-	200	mA
dV/dt	Max. linear rate of rise of off-state voltage	To 67% V_{DRM}, T_j = 125° C, gate open		-	1500	V/µs
dI/dt	Rate of rise of on-state current	From 67% V_{DRM} to 2x $I_{T(AV)}$	Repetitive 50Hz	-	150	A/µs
		Gate source 30V, 10Ω, t_r < 0.5µs, T_j = 125° C	Non-repetitive	-	300	A/µs
$V_{T(TO)}$	Threshold voltage – Low level	500A to 2500A at T_{case} = 125° C		-	0.80	V
	Threshold voltage – High level	2500A to 7200A at T_{case} = 125° C		-	0.95	V
r_T	On-state slope resistance – Low level	500A to 2500A at T_{case} = 125° C		-	0.1714	mΩ
	On-state slope resistance – High level	2500A to 7200A at T_{case} = 125° C		-	0.1114	mΩ
t_{gd}	Delay time	V_D = 67% V_{DRM}, gate source 30V, 10Ω t_r = 0.5µs, T_j = 25° C		TBD	TBD	µs
t_q	Turn-off time	T_j = 125° C, V_R = 200V, dI/dt = 1A/µs, dV_{DR}/dt = 20V/µs linear		100	250	µs
Q_S	Stored charge	I_T = 2000A, T_j = 125° C, dI/dt – 1A/µs,		700	2200	µC
I_L	Latching current	T_j = 25° C, V_D = 5V		TBD	TBD	mA
I_H	Holding current	T_j = 25° C, R_{G-K} = ∞, I_{TM} = 500A, I_T = 5A		TBD	TBD	mA

GATE TRIGGER CHARACTERISTICS AND RATINGS

Symbol	Parameter	Test Conditions	Max.	Units
V_{GT}	Gate trigger voltage	V_{DRM} = 5V, T_{case} = 25° C	1.5	V
V_{GD}	Gate non-trigger voltage	At V_{DRM}, T_{case} = 125° C	TBD	V
I_{GT}	Gate trigger current	V_{DRM} = 5V, T_{case} = 25° C	250	mA
I_{GD}	Gate non-trigger current	V_{DRM} = 5V, T_{case} = 25° C	TBD	mA

CURVES

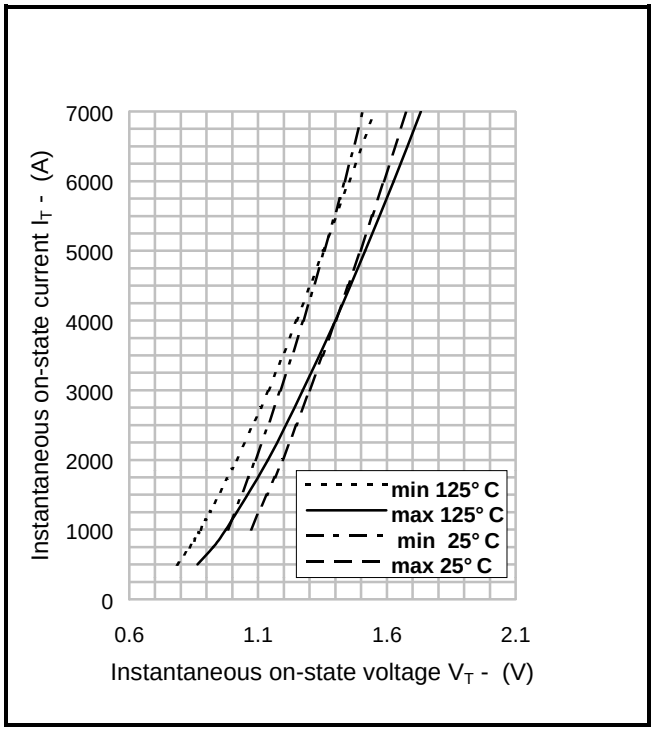

Fig.2 Maximum & minimum on-state characteristics

V_{TM} EQUATION

$V_{TM} = A + B\ln(I_T) + C.I_T + D.\sqrt{I_T}$

Where A = 0.566974
B = 0.019159
C = 0.000059
D = 0.006897

these values are valid for T_j = 125° C for I_T 100A to 7200A

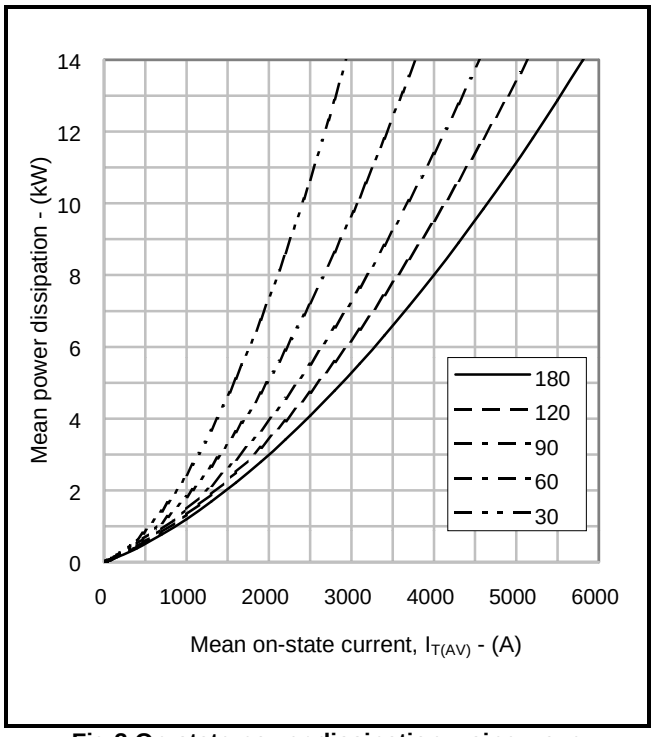

Fig.3 On-state power dissipation – sine wave

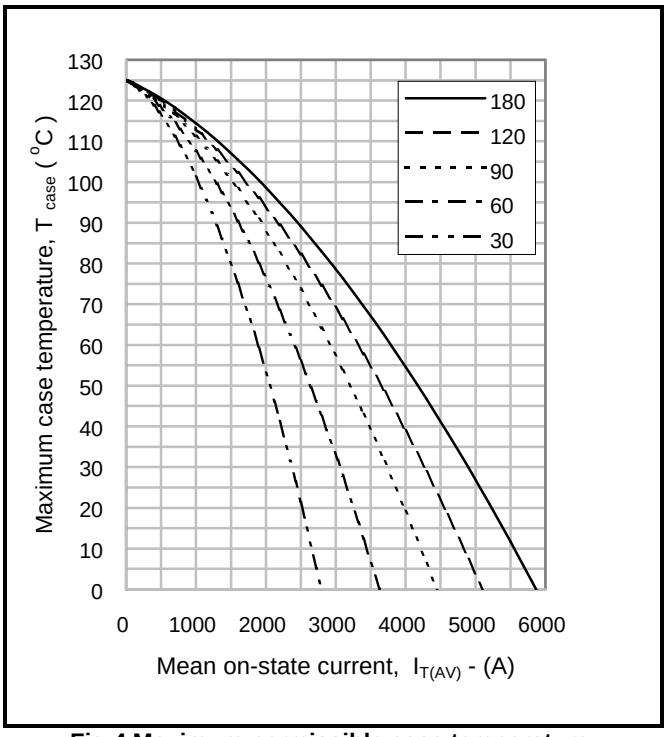

Fig.4 Maximum permissible case temperature, double side cooled – sine wave

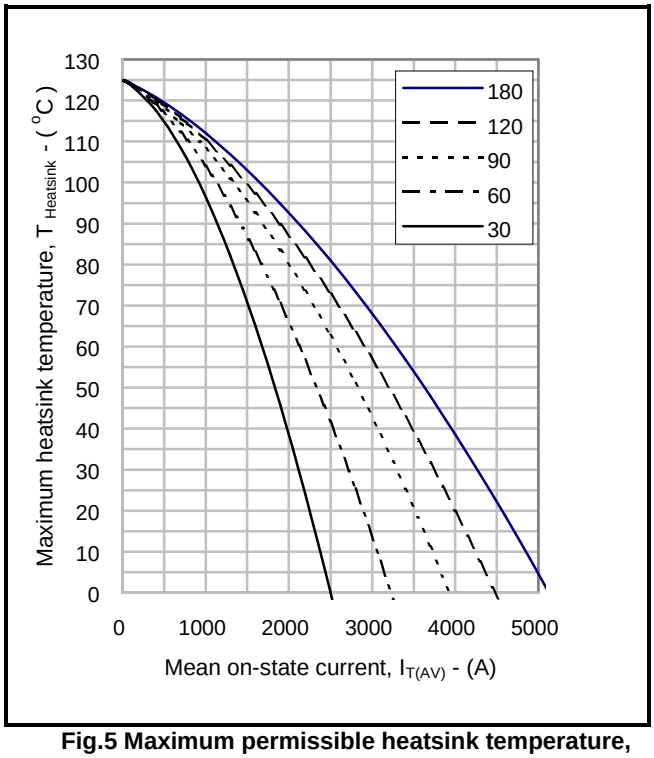

Fig.5 Maximum permissible heatsink temperature, double side cooled – sine wave

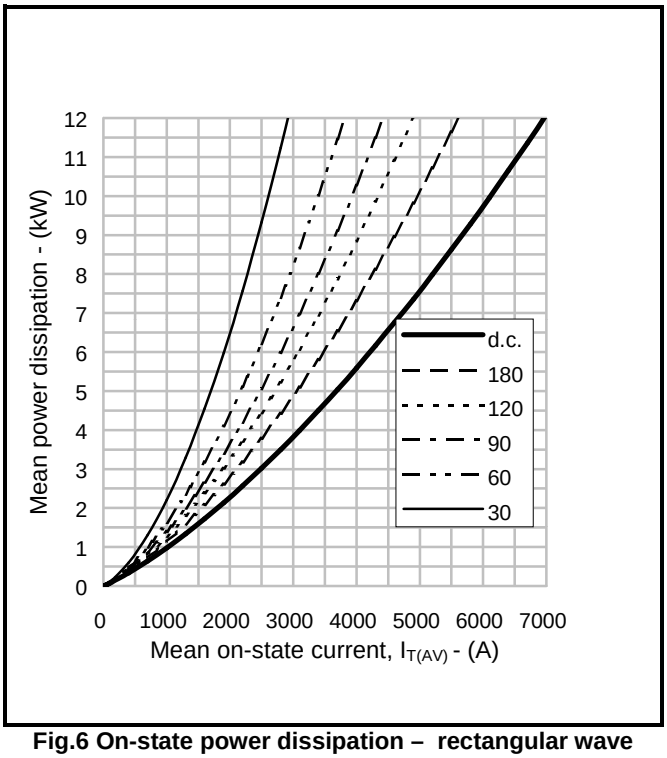

Fig.6 On-state power dissipation – rectangular wave

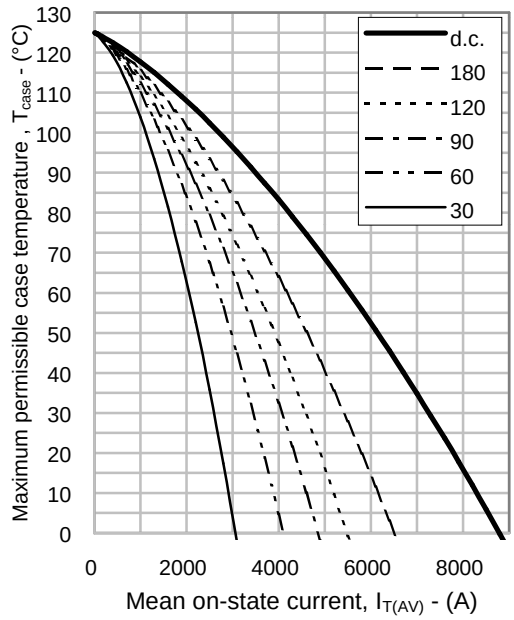

Fig.7 Maximum permissible case temperature, double side cooled – rectangular wave

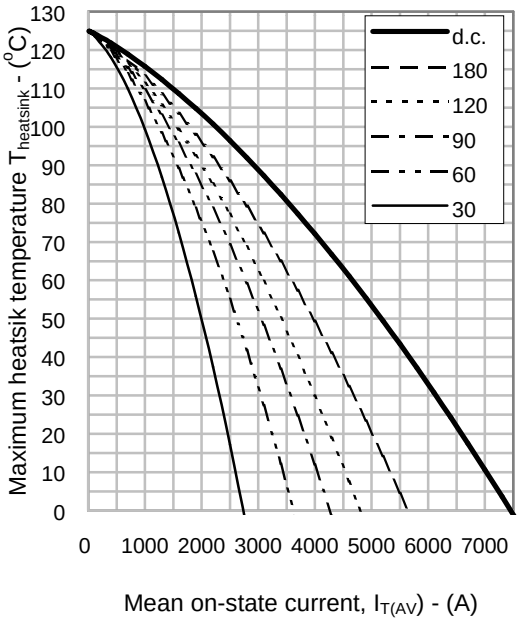

Fig.8 Maximum permissible heatsink temperature, double side cooled – rectangular wave

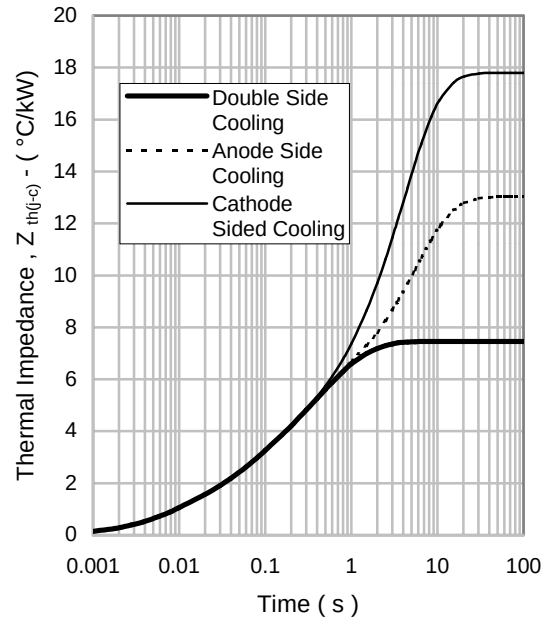

		1	2	3	4
Double side cooled	R_i (° C/kW)	0.9206	1.8299	3.4022	1.3044
	T_i (s)	0.0076807	0.0579454	0.4078613	1.2085
Anode side cooled	R_i (° C/kW)	0.9032	1.6719	3.0101	7.4269
	T_i (s)	0.0075871	0.0536531	0.3144537	5.624
Cathode side cooled	R_i (° C/kW)	0.9478	2.0661	1.6884	13.0847
	T_i (s)	0.0078442	0.0645541	0.3894389	4.1447

$\Delta R_{th(j-c)}$ Conduction

Tables show the increments of thermal resistance $R_{th(j-c)}$ when the device operates at conduction angles other than d.c.

Double side cooling		
	ΔZ_{th} (z)	
θ°	sine.	rect.
180	1.34	0.88
120	1.57	1.30
90	1.83	1.54
60	2.08	1.81
30	2.27	2.11
15	2.36	2.28

Anode Side Cooling		
	ΔZ_{th} (z)	
θ°	sine.	rect.
180	1.34	0.88
120	1.57	1.30
90	1.84	1.54
60	2.08	1.81
30	2.28	2.11
15	2.37	2.28

Cathode Sided Cooling		
	ΔZ_{th} (z)	
θ°	sine.	rect.
180	1.33	0.88
120	1.57	1.29
90	1.83	1.53
60	2.07	1.80
30	2.26	2.10
15	2.35	2.26

Fig.9 Maximum (limit) transient thermal impedance – junction to case (° C/kW)

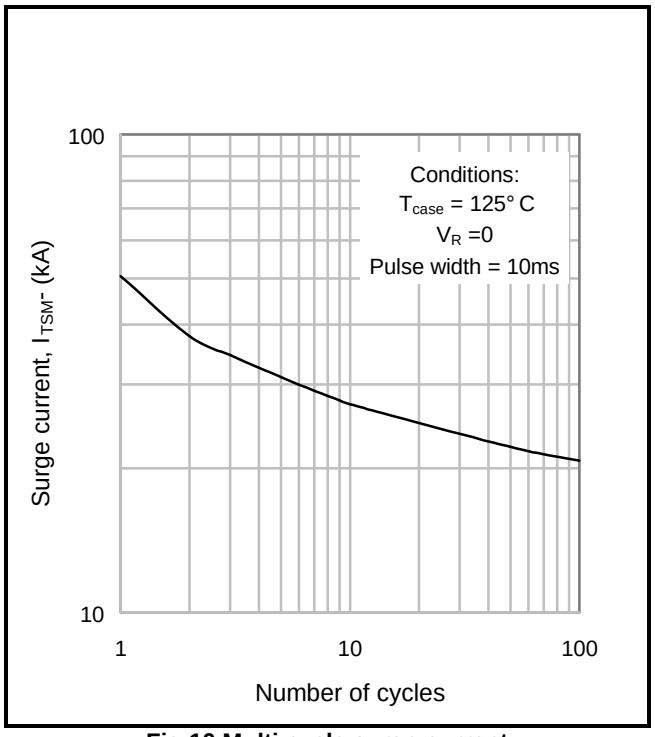

Fig.10 Multi-cycle surge current

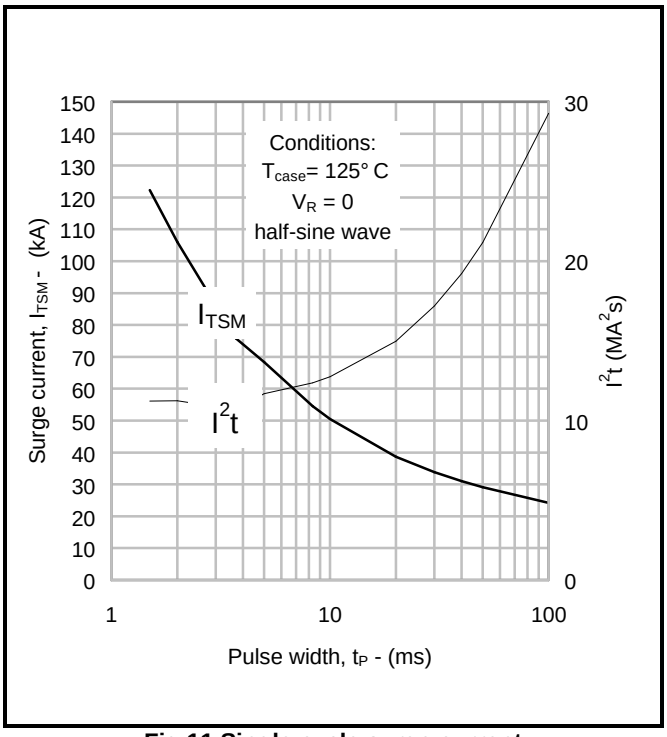

Fig.11 Single-cycle surge current

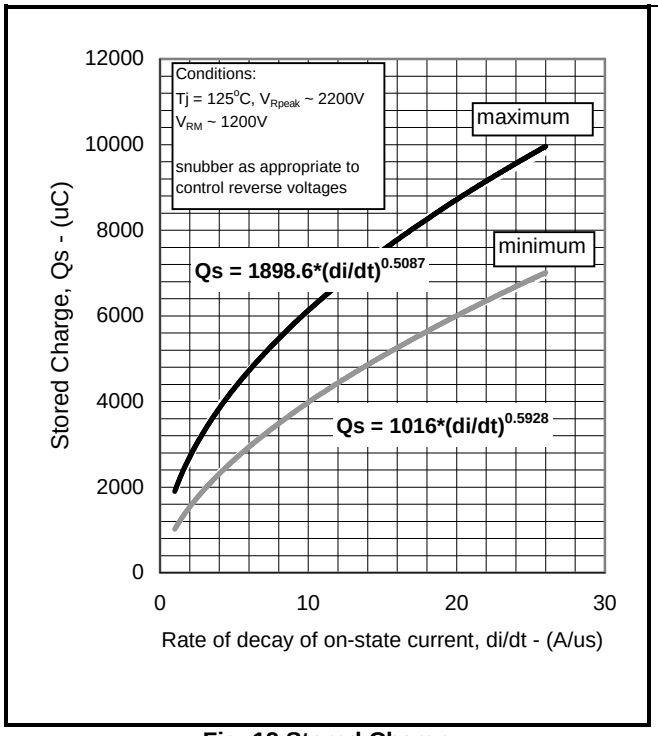

Fig. 12 Stored Charge

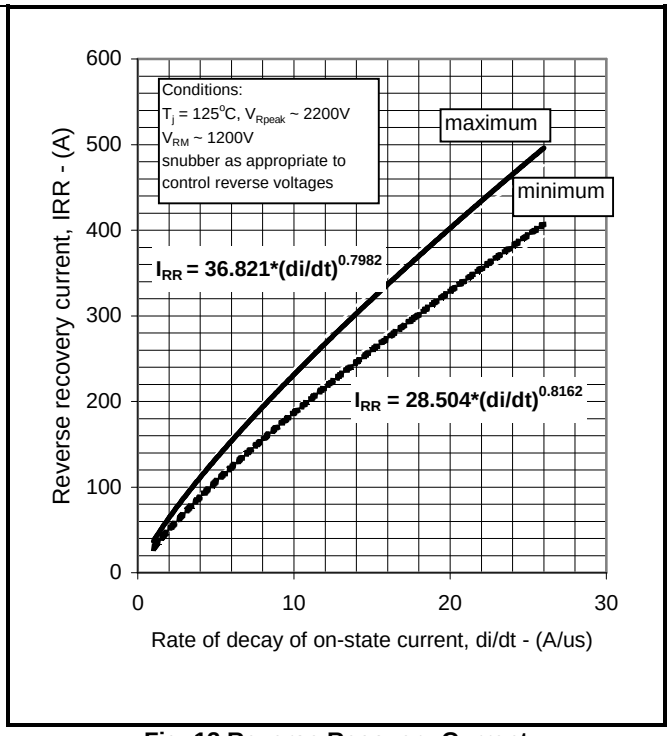

Fig. 13 Reverse Recovery Current

PACKAGE DETAILS

For further package information, please contact Customer Services. All dimensions in mm, unless stated otherwise. DO NOT SCALE.

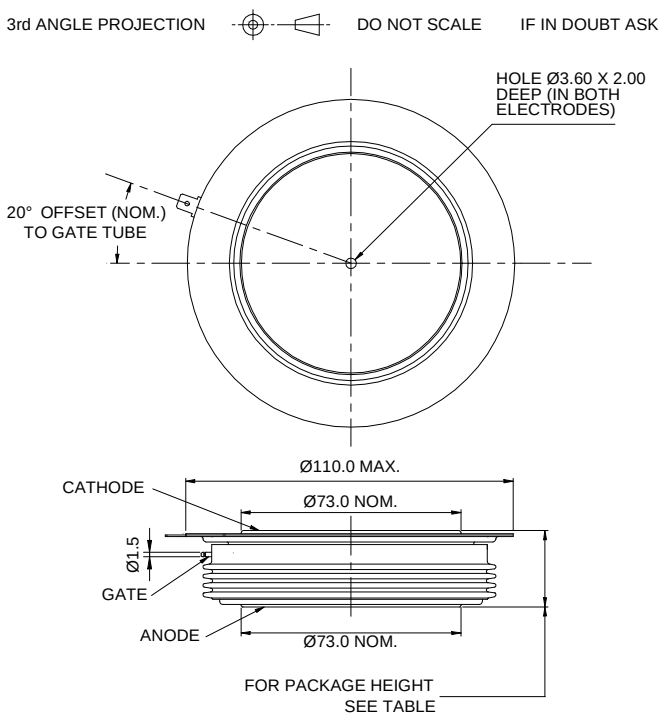

Device	Maximum Thickness (mm)	Minimum Thickness (mm)
DCR1474SV18	27.265	26.515
DCR1475SV28	27.34	26.59
DCR1476SV42	27.57	26.82
DCR1478SV48	27.69	26.94
DCR1574SV28	27.34	26.59
DCR1575SV42	27.57	26.82
DCR1576SV52	27.69	26.94
DCR4060V22	27.265	26.515
DCR3780V28	**27.34**	**26.59**
DCR3030V42	27.57	26.82
DCR2720V52	27.69	26.94
DCR2290V65	27.95	27.2
DCR1910V85	28.31	27.56

Lead length: 420mm
Lead terminal connector: M4 ring

Package outline type code: V

Fig.15 Package outline

POWER ASSEMBLY CAPABILITY

The Power Assembly group was set up to provide a support service for those customers requiring more than the basic semiconductor, and has developed a flexible range of heatsink and clamping systems in line with advances in device voltages and current capability of our semiconductors.

We offer an extensive range of air and liquid cooled assemblies covering the full range of circuit designs in general use today. The Assembly group offers high quality engineering support dedicated to designing new units to satisfy the growing needs of our customers.

Using the latest CAD methods our team of design and applications engineers aim to provide the Power Assembly Complete Solution (PACs).

HEATSINKS

The Power Assembly group has its own proprietary range of extruded aluminium heatsinks which have been designed to optimise the performance of Dynex semiconductors. Data with respect to air natural, forced air and liquid cooling (with flow rates) is available on request.

For further information on device clamps, heatsinks and assemblies, please contact your nearest sales representative or Customer Services.

Stresses above those listed in this data sheet may cause permanent damage to the device. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture of the package. Appropriate safety precautions should always be followed.

http://www.dynexsemi.com

e-mail: power_solutions@dynexsemi.com

HEADQUARTERS OPERATIONS
DYNEX SEMICONDUCTOR LTD
Doddington Road, Lincoln
Lincolnshire, LN6 3LF. United Kingdom.
Tel: +44(0)1522 500500
Fax: +44(0)1522 500550

CUSTOMER SERVICE
Tel: +44(0)1522 502753 / 502901. Fax: +44(0)1522 500020

© Dynex Semiconductor 2003 TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRODUCED IN UNITED KINGDOM.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.